FOSCAM

Quick Installation Guide

HD Wireless Baby Monitor

FosBaby

V1.0
EE200402

Package Contents

FosBaby

Mounting Bracket

Temperature Detection Sensor

Watch strap

Warning Sticker

Power Adapter

Power Line

Resource CD

Quick Installation Guide

Security Warning Card

Security Warning

- **Foscam cameras require good security practices to safeguard your privacy. You can help protect your camera by changing the default username and/or password.**
- **You should update your camera regularly at http://www.foscam.us/firmware.html. Make sure your camera has the latest firmware installed for your specific camera model.**

1 Hardware Introduction

1.1 Physical Description

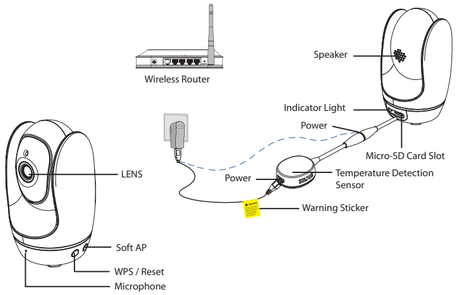

Notes:

- You can use a mobile power whose output current is 5V/2A to provide power for FosBaby. We recommend that you choose the capacity of 5000 mAh mobile power, it can provide power for about 6.5 hours.
- Due to the insufficient of current strength, we do not recommend that you use PC or laptop to provide power for FosBaby.

1.2 Hardware Installation

- Put the camera on the desk
- Install it on the wall

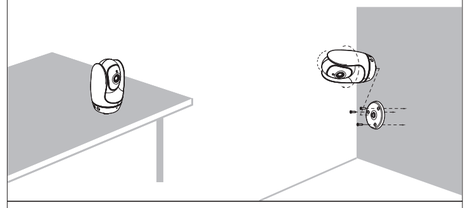

- Use a watch strap for fastening

Use a fastening watch strap to fasten the camera on a certain column where the baby can be monitored conveniently.



2 FosBaby Connection

1. Start FosBaby: power on, the indicator light of FosBaby will light on, and a short musical tone indicates that the startup is completed.

2. Press the Soft AP button for 3-5 seconds. The indicator begins to twinkle at very high frequency.

3. Use a terminal which could search the WLAN (desktop, laptop, mobile phone, or pad. This part takes laptop as an example.) to search for the AP named "FosBaby_******" for connection.


Soft AP Button



FOSCAM

Foscam Digital Technologies LLC
www.foscam.us

4. After finishing Soft AP connection, use the web browser of the terminal to visit **http://192.168.1.1:88**.



5. Log in to the camera (**Default username is admin with no password**). When you login for the first time, it will request that you modify the default username and/or password.

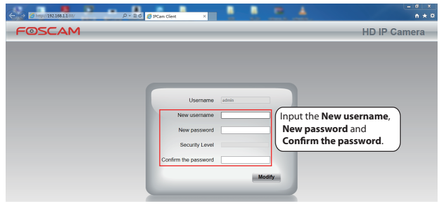

Note:

- When logging in for the first time, you need to download and install the add-on.



6. After logging in for the first time, it will go to "Setup Wizard" automatically. Please set the basic parameters of FosBaby, such as camera name, camera time, wireless settings (The FosBaby connect to your wireless router: Wireless Network List - enter the password of your wireless router), IP configuration.

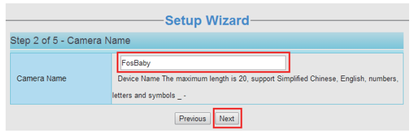

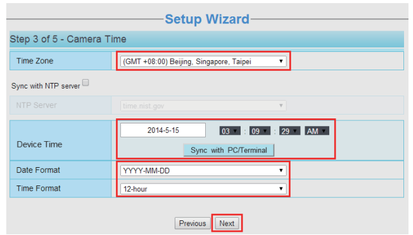

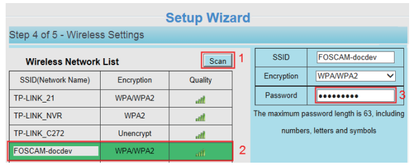

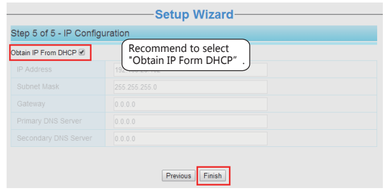

Notes:

- We recommend you to choose to manually set the IP when you know some knowledge of the network.
- It needs about 1 minute to connect FosBaby to your router.

7. Please connect your laptop to the router which your FosBaby has connected to.



8. Open the CD named “FOSCAM”, go to the folder “IP Camera Search Tool” and find the folder “For Windows OS” or “For Mac OS”. Copy and paste the IP camera tool file to your computer, or drag it onto your desktop.



Note:

- If you have multiple cameras and you cannot determine which camera you are going to log in to. Please match the "Device MAC address" on the search tool with the MAC address on the label pasted of each camera.

9. Double-click the camera list here, and your default browser will open up to the login page. Input the username and password you has changed. Then, you will see the live video of your baby on the interface.

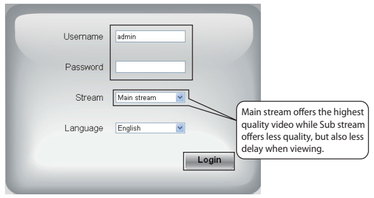

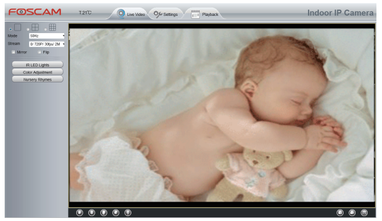

Now, you could use your FosBaby in LAN. (The way to see the live video using App, please refer to FAQ in Section 4.)

Note:
64-bit browser is not supported.

3 Remote Access by Smartphone

1. Search and install **Foscam Viewer** on App Store or Google Play for iOS or Android devices.

2. Click the App icon to start the software. In the IPC management interface, click the button , Your phone will go into the QR code scanning mode. When you finish the QR code scanning, the UID will be input automatically, then input **Device Name**, **Username**, **Password**, click **OK**.

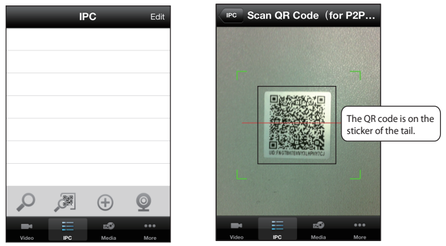

Notes:

- If the QR code scanning is not successful, click the button , please input the UID on the Stickers of the camera. The procedure for inputting data is as follows. Click **Add**.

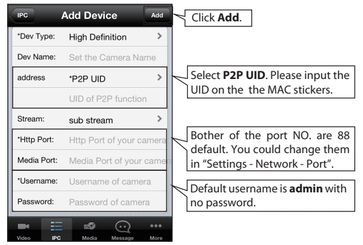

- To access a remote camera on a Windows PC, please install the CMS software and perform relevant operations. For the installation file and operation guide of the CMS, please refer to Foscam IP Camera Client in the CD. If your computer supports the automatic running function, you can find relevant files on the automatically open page.
- If you would like to read more details on the App, please refer to the App User Manual in the CD.

4 FAQ

★ WPS / Reset Button and Soft AP Button

WPS / Reset Button: WPS connection button (It is another way of FosBaby’s wireless connection. Press it for about 3-5 seconds), FosBaby’s reset button (press it for about 10 seconds or longer).

Soft AP Button: Wireless hotspot. It is one way of wireless connection.



★ Using Foscam Viewer to see the live video in LAN (For mobile phone and pad)

1. Open the App “Foscam Viewer” which you has dowloaded before, in the prerequisite that your mobile phone and the camera are connected to the same router, click the App icon to start the software. In the IPC management interface, click the button , After the App search FosBaby, click **Add**.

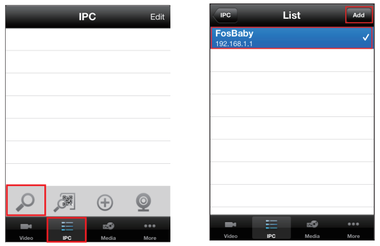

2. Return to the IPC management interface, FosBaby has been successfully added to the App, click it to connect. When it connect successfully, you can watch the video of your baby in the "Video" interface.

★ Forget the username or password

Restore the FosBaby:

1. Make FosBaby power on, press "WPS/Reset" button for about 10 seconds, the indicator light will go off;

2. Release the button and wait about 30 seconds, FosBaby will automatically restart. Now its username/password recover to **admin with no password** (you need to reconfigure Wi-Fi).

★ No video on the web

1. Verify if the plugin is successfully installed;

2. If the plugin is not installed or installed incorrectly, check the user manual in the CD and re-install plugin.

5 Technical Support

We hope your experience with the Foscam IP camera is enjoyable and easy to use. If you experience some issues or have any questions that this Quick Installation Guide has not answered, please contact our support department via e-mail at **support@foscam.us**. You can also reach technical support by dialing **1-800-930-0949** 24 hours a day, 7 days a week.